





## VCXO 系列 (SMD 2016 2520 3225 5032)

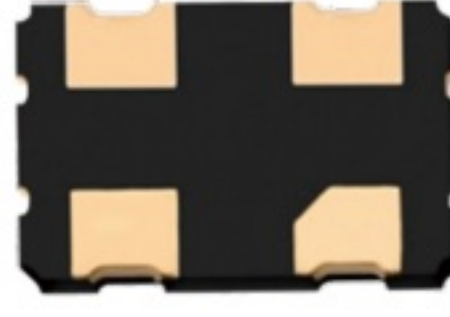

### Specifications

Item	VCXO 系列 (SMD2016 2520 3225 5032)	
Frequency Range	32.768KHz~300MHz	
Frequency Stability	±25ppm、±50ppm、∞ or specify	
Operating Temperature Range	-20°C~70°C、-40°C~85°C	
Storage Temperature Range	-55°C ~ 125°C	
Voltage	+1.8~5.5 VDC	
Output	Load	15pF, or specify
	Type	CMOS
	Duty:Normal	45%~55%
	Rise and Fall Time	10ns Max
	Voltage:logic	"O"Level 0.1VDC Max "I"Level 0.9VDC Min
Absolute Pulling Range	±50ppm ∞ or specify	
Linearity	±10% Max	
Enable/Disable Function	Pin1: High 0.5VDD Min or open	
	low 0 VDD	
Start-up Time	10ms Max	

### VCXO 5032 Dimension ( mm )

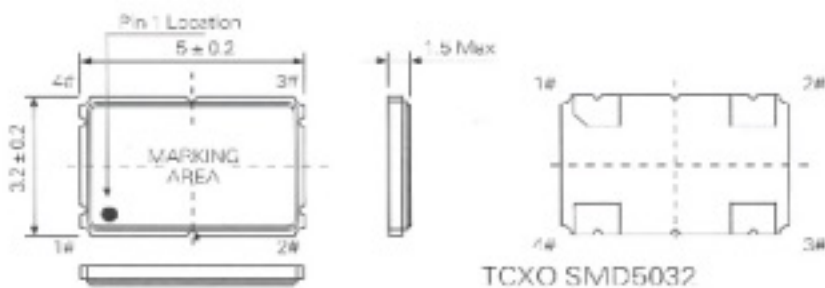

### Solder Reflow Profile

